


## 特点 Features

标准的5.0 x 3.2 x 1.0 mm陶瓷封装表面贴装形式  
 小公差及高稳定性  
 适应自动装配的12MM宽度的编带包装  
 包装：每卷1000PCS  
 Typical 5.0 x 3.2 x 1.0 mm Ceramic SMD package  
 Tight tolerance and Stability  
 12mm width Tape & Reel package for automatic assembly  
 Packing: Tape & Reel, 1000 pcs per Reel

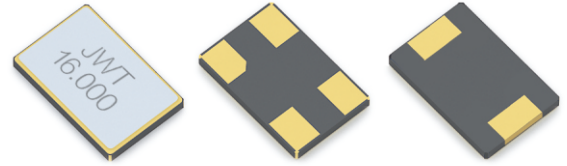

## 标准规格 Electronic Specification

型号 Type	SMD5032
频率范围 Frequency Range	8.000 ~ 54.000MHz
振荡模式 Oscillator Mode	Fund(AT cut)
调整频差 Frequency Tolerance(at25°C)	± 10ppm, ± 20ppm, specify
温度频差 Frequency Stability	具体见表2
工作温度 Operating Temperature Range	-40°C ~ 125°C
贮存温度 Storage Temperature Range	-55°C ~ 125°C
负载电容 Load Capacitance	Custom design(8 ~ ∞pF)
激励电平 Drive Level	100 μW Typical (400 μW max.)
静态电容 Shunt Capacitance	5pF max.
老化率 Aging	ΔF/F: ± 3ppm/first year(max.)

特殊技术要求可定制

## 等效电阻 Equivalent Series Resistance(E.S.R.)

频率范围 Frequency Range	盒型 Hold Type	振动模式 Mode	等效电阻 E.S.R.	频率范围 Frequency Range	盒型 Hold Type	振动模式 Mode	等效电阻 E.S.R.
8.000 ~ 10.999MHz	SMD	AT,Fund	80Ω Max.	12.000 ~ 24.999MHz	SMD	AT,Fund	40Ω Max.
11.000 ~ 11.999MHz	SMD	AT,Fund	50Ω Max.	25.000 ~ 54.000MHz	SMD	AT,Fund	30Ω Max.

Table 1

## 温度频差和工作温度范围 Frequency Stability Vs Operating Temperature range

Temp.(°C)\ppm	± 10	± 15	± 20	± 25	± 30	± 50
-20 to 70°C	○	○	○	○	○	○
-40 to 85°C		△	○	○	○	○
-40 to 125°C					△	○

○:可实现的 △:与供应商沟通

Table 2

## 外型尺寸 Outline Dimensions(Unit:mm)

